

LARGE IC PNEUMATIC



13500 - 17500 LBS.

SPECIFICATIONS



50-8FG60U-80U

CLASS
5

INTERNAL COMBUSTION ENGINE PNEUMATIC TIRE

ToyotaForklift.com

LARGE IC PNEUMATIC

CAPACITY
13500 – 17500 LBS.

MAXIMUM FORK HEIGHT
239 IN.

LOAD CENTER
24 IN.

INDUSTRIES



Distribution



Factory



General
Manufacturing



General
Warehousing



Lumber



Paper



Retail

STANDARD FEATURES

DURABILITY

- Control Area Network (CAN-bus) communication
- Fully stamped steel side panels
- Full-floating front axle
- Moisture-resistant electric connectors
- Limited free-lift 2-stage mast (V)
- High cooling capacity radiator
- Tilt cylinder boots
- Low-maintenance battery
- Large-capacity engine-cooling fan
- 8" cyclone air cleaner
- Plate-iron front fenders
- Anti-restart ignition key switch
- Stamped steel engine hood
- Radiator screen
- External hydraulic oil cooler
- Force-cooled wet disc brakes
- Fully oil charged lift cylinder

SUPPORT

- System of Active Stability™ (SAS)
- Operator Presence Sensing System (OPSS)
- Bolt-on overhead guard
- Key lowering interlock
- Electric horn
- Neutral start safety switch
- Asbestos-free components
- Orange forks
- LED headlights
- Key off/headlight off system
- Speed control

PERFORMANCE

- EPA/CARB-certified engine
- UL "LP" Engine
 - 1FS US 4-cylinder, 3.7L OHV engine
 - Electronic fuel injection
- 2 speed automatic (powershift) transmission
 - 2FWD/2REV speeds
 - Electronically controlled
- Automatic transmission with oil cooler
- LCD multi-function display – includes:
 - Data log, fuel, and operation information with QR code output
- Master warning, wheel, direction, and mast tilt indicators
- Various hours meters
- Engine coolant temperature gauge
- Fuel gauge (excluding LP)
- Check engine light
- Engine oil pressure warning light
- Parking brake indicator
- SAS/OPSS warning light
- Alternator with built-in regulator
 - LP model = 70A
- Full-floating powertrain
- Treaded pneumatic tires (front & rear)
- Wide tread
- 1st gear lock switch on steering column
- Distributor Less Ignition System (1FS)
- Sealed Starter
- Wet Brakes
- Dual Drive Tires
- Side Ring Rear Wheel

ERGONOMICS

- 11.8"-dia., two-spoke steering wheel
- Load-sensing power steering
- One-way automatic fork leveling
- Double-action parking brake (hand)
- Integrated headlight & turn signal lever
- Cowl-mounted hydraulic control levers with rubber boot covers
- 12"-long dual operator assist grips
- Low, wide entry steps
- Dash-mounted instrument display
- Oversized cup holder
- Premium Full-Suspension Seat (Vinyl)
- Non-cinching seatbelt

SERVICEABILITY

- Easy-access no tools required floorboard
- Engine hood assist damper with lock device
- Engine protection system
- Air cleaner discharge valve
- Easy-lift engine hood with wide 75° opening
- Easy access to common service items such as filters & dipsticks

OPTIONAL EQUIPMENT

MASTS

- Wide Visible Mast (V)
- Full-Free Lift Three-Stage Mast (FSV)

LOAD HANDLING

- Fork Bar (Carriage)
- Fully Oil Charged Lift Cylinders
- High Load Backrest
- Hydraulic Accumulator
- Hydraulic Quick Disconnects (Dual)
- Less Forks
- Less Mast and Forks and Load Backrest
- Pin Type Forks
- Side Hosing Termination
- Tapered Forks
- Without Load Backrest
- 96" Forks, Hang-On Style
- 96" Forks, Pin-Type
- Metallic Mast Bushings

LOAD HANDLING (HOSE & VALVE ASSEMBLY, ATTACHMENTS)

- Various 3-Way & 4-Way Valves
- Various Cascade Attachments
- Various Clamp Release Interlock Levers
- Integral Sideshifter (Rightline)
- Integral Sideshifting Fork Positioner (Rightline)

BODY

- Engine Hood Ventilation
- Various Polycarbonate OHG Cover Options
- Rear View Mirrors (Left & Right Sides)
- Adjustable Cabin Mirrors
- Various Special Color Cab Options
- Various Special Paint Options
- Steel Cabin

POWERTRAIN

- 43.5 lb. LP Aluminum Tank
- 43.5 lb. LP Steel Tank
- Box Fin Radiator
- Cold Climate Spec
- Cyclone Air Cleaner (Dual Element)
- High Capacity Alternator
- High Capacity Battery
- High Capacity Cooling Package
- Keyless Ignition Switch
- Low LPG Fuel Warning Indicator
- LPG Bracket (Swing Down Type)
- LPG Regulator Drain Valve
- Pre-Cleaner
- Pre-Cleaner with Rear Worklight
- Sealed Alternator

STEERING AND OPERATION

- Directional Lever on Column
- EZ Pedal Foot Direction Control
- Intelli-Shift
- Mini Lever controls with Ergo-Shift
- Single Pedal (Combination Brake/Inching)
- Steering Wheel with Knob
- Synchronized Steering
- Factory Set Speed Limit
- EZ Control Joystick® Upgrade (Non-Clamping Attachments)
- EZ Fingertip Controls®

LIGHTS

- Blue Light (Key ON/OFF)
- Blue Light (Back ON/OFF)
- LED Front Combination Lights
- LED Headlights
- LED Rear Combination Lights
- LED Rear Working Light
- LED Reverse Activated Rear Work Light
- LED Strobe Light - Amber
- LED Strobe Light - Blue
- Red Zone Light
- Key Activated, Forward Facing Blue Light
- Key Off Head Light Off System
- Operator Compartment Light
- Wiring Harness for rear overhead guard options
- Auto Lights On/Off (Wired to Oil Pressure Switch)

SEAT AND SEAT BELTS

- Premium, full-suspension vinyl seat
- Premium, full-suspension fabric seat
- 4-Way Adjustable Cloth Full-Suspension Seat
- Swivel Seat - Cloth (with G40C seat)
- Swivel Seat - Vinyl (with G40I seat)
- Seat Belt Interlock
- Mordura Full Suspension Seat

INDICATORS AND MISCELLANEOUS

- 12 Volt Power Supply
- Adj Volume Back-up Alarm (Smart Alarm)
- Back-Up Alarm
- Block Heater
- Fire Extinguisher
- 5 Pound Fire Extinguisher Upgrade
- Operator Cooling Fan
- Pencil/Tape Holder (Mounted on OHG Leg)
- Hydraulic Oil Temp Gauge
- Pre Delivery Inspection
- Programmable Security Lock
- Rear Pillar Assist Grip with Horn Button
- Tablet Power Supply and Mount
- SEnS Smart Environment Sensor
- Quickfit Oil Change System

CHASSIS

- Force-Cooled Wet Disc Brakes
- Dual Drive Tires
- Front Solid Tires
- Rear Solid Tires
- Side Ring Rear Wheel

SPECIAL U.L. MODELS


- U.L. LPS Approved Model
- G/LP Dual Fuel Model

TRUCK SPECIFICATIONS

				MODEL NUMBERS					
GENERAL DATA				50-8FG60U		50-8FG70U		50-8FG80U	
Load Capacity		lb (kg)		13500 (6000)		15500 (7000)		17500 (8000)	
Power Type				LP		LP		LP	
Operator Position				Seated Rider		Seated Rider		Seated Rider	
Tire Type		Front / Rear		Pneumatic / Pneumatic		Pneumatic / Pneumatic		Pneumatic / Pneumatic	
Wheels (x = driven)		Front / Rear		4x / 2		4x / 2		4x / 2	
EXTERIOR DIMENSIONS				50-8FG60U		50-8FG70U		50-8FG80U	
A Maximum Fork Height (top of forks)		in (mm)		120.5 (3060)		120.6 (3065)		120.8 (3070)	
B Free-Lift (top of forks)		in (mm)		4.9 (125)		4.9 (125)		5.1 (130)	
C Fork Size (T x W x L)		in (mm)		2.4 x 6 x 48 (60 x 150 x 1220)		2.6 x 6 x 48 (65 x 150 x 1220)		2.8 x 6 x 48 (70 x 150 x 1220)	
D Fork Spread Max. / Min. (outer edge to edge)		in (mm)		66.9 / 11.8 (1700 / 300)		66.9 / 11.8 (1700 / 300)		66.9 / 11.8 (1700 / 300)	
E Tilt Range (forward / backward)		deg		6 / 12		6 / 12		6 / 12	
F Length to Fork Face		in (mm)		137.4 (3490)		139.6 (3545)		141.3 (3590)	
G Overall Width		in (mm)		78.5 (1995)		78.5 (1995)		78.5 (1995)	
H Mast Lowered Height		in (mm)		96.8 (2460)		96.8 (2460)		102.8 (2610)	
I Mast Extended Height (top of load backrest)		in (mm)		174.6 (4435)		174.6 (4435)		174.8 (4440)	
J Overhead Guard Height ³		in (mm)		90.9 (2310)		90.9 (2310)		90.9 (2310)	
K Turning Radius (inside / outside)		in (mm)		127 (3230)		129 (3280)		130.5 (3320)	
L Load Distance ¹		in (mm)		22.8 (580)		23 (585)		23.2 (590)	
M Basic Right-Angle Stacking Aisle Width		in (mm)		151 (3830)		153.0 (3890)		155.0 (3940)	
PERFORMANCE DATA				50-8FG60U		50-8FG70U		50-8FG80U	
Speeds	Maximum Travel (forward / reverse)	Full Load	mph (km/h)	11.8 (19.0) / 11.8 (19.0)		11.5 (18.5) / 11.5 (18.5)		11.5 (18.5) / 11.5 (18.5)	
		No Load	mph (km/h)	12 (19.5) / 12 (19.5)		12 (19.5) / 12 (19.5)		12 (19.5) / 12 (19.5)	
	Lifting	Full Load	fpm (mm/sec)	83 (420)		83 (420)		69 (350)	
		No Load	fpm (mm/sec)	85 (430)		85 (430)		85 (430)	
	Lowering	Full Load	fpm (mm/sec)	104 (530)		104 (530)		104 (530)	
		No Load	fpm (mm/sec)	94 (480)		94 (480)		94 (480)	
Drawbar Pull	Maximum	Full Load	lb (kg)	9900 (4500)		9700 (4400)		9700 (4400)	
		No Load	lb (kg)	4700 (2130)		4480 (2030)		4440 (2010)	
Gradeability	1 mph (1.5 km/h) ¹	Full Load	%	25		22		19	
		Full Load	%	32		28		25	
	Maximum ¹	No Load	%	24		21		19	
TRUCK WEIGHTS				50-8FG60U		50-8FG70U		50-8FG80U	
Total Weight		lb (kg)		18720 (8500)		20170 (9160)		22040 (10010)	
Weight Distribution	Full Load (front / rear)	lb (kg)		28650 (13000) / 3300 (1500)		31740 (14400) / 3870 (1760)		35110 (15930) / 4570 (2080)	
	No Load (front / rear)	lb (kg)		8480 (3850) / 10240 (4650)		8170 (3710) / 12000 (5450)		8120 (3690) / 13920 (6320)	
TIRES				50-8FG60U		50-8FG70U		50-8FG80U	
Tires	Number (front / rear)		4 / 2		4 / 2		4 / 2		
	Size	Front	8.25-15-12PR		8.25-15-14PR		8.25-15-14PR		
		Rear	8.25-15-12PR		8.25-15-14PR		8.25-15-14PR		
Wheelbase		in (mm)		88.6 (2250)		88.6 (2250)		88.6 (2250)	
Tread Width (front / rear)		in (mm)		57.9 (1470) / 57.5 (1460)		57.9 (1470) / 57.5 (1460)		57.9 (1470) / 57.5 (1460)	
Underclearance (full load)	Minimum with Load		in (mm)		4.9 (125)		4.9 (125)		
	Center of Wheelbase		in (mm)		9.8 (250)		9.8 (250)		
Brake	Service (foot) / Parking		Hydraulic <wet> / Hand		Hydraulic <wet> / Hand		Hydraulic <wet> / Hand		
POWER SYSTEM				50-8FG60U		50-8FG70U		50-8FG80U	
Battery (5-hour rating)		V / Ah		12 / 35		12 / 35		12 / 35	
Internal Combustion Engine ⁴	Model		1FS-US		1FS-US		1FS-US		
	Rated Horsepower @ rpm	SAE HP	88 @ 2530		88 @ 2530		88 @ 2530		
		(kW)	(66 @ 2530)		(66 @ 2530)		(66 @ 2530)		
	Rated Torque @ rpm	SAE ft-lb	212 @ 1500		212 @ 1500		212 @ 1500		
		(N-m)	(288 @ 1500)		(288 @ 1500)		(288 @ 1500)		
	Number of Cylinders		4		4		4		
	Piston Displacement		cu in (cc)		224 (3685)		224 (3685)		
Fuel Tank Capacity		US gal (liter)		34 (130)		34 (130)			
Transmission	Type		Powershift		Powershift		Powershift		
	Speeds (forward / reverse)		2 / 2		2 / 2		2 / 2		
Auxiliary Hydraulic Function Specifications (for attachments) ²	Max. Operating Pressure		psi (kg/cm2)		2990 (210)		2990 (210)		
	Max. Flow Rate		gpm (lpm)		33.8 (128)		33.8 (128)		

1 Computed values.
2 Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.).
3 Overhead guard height tolerance is +/- 1.57" (measured from the ground to the top of the overhead guard)
4 Estimated based on preliminary performance test data

EXTERIOR DIMENSIONS

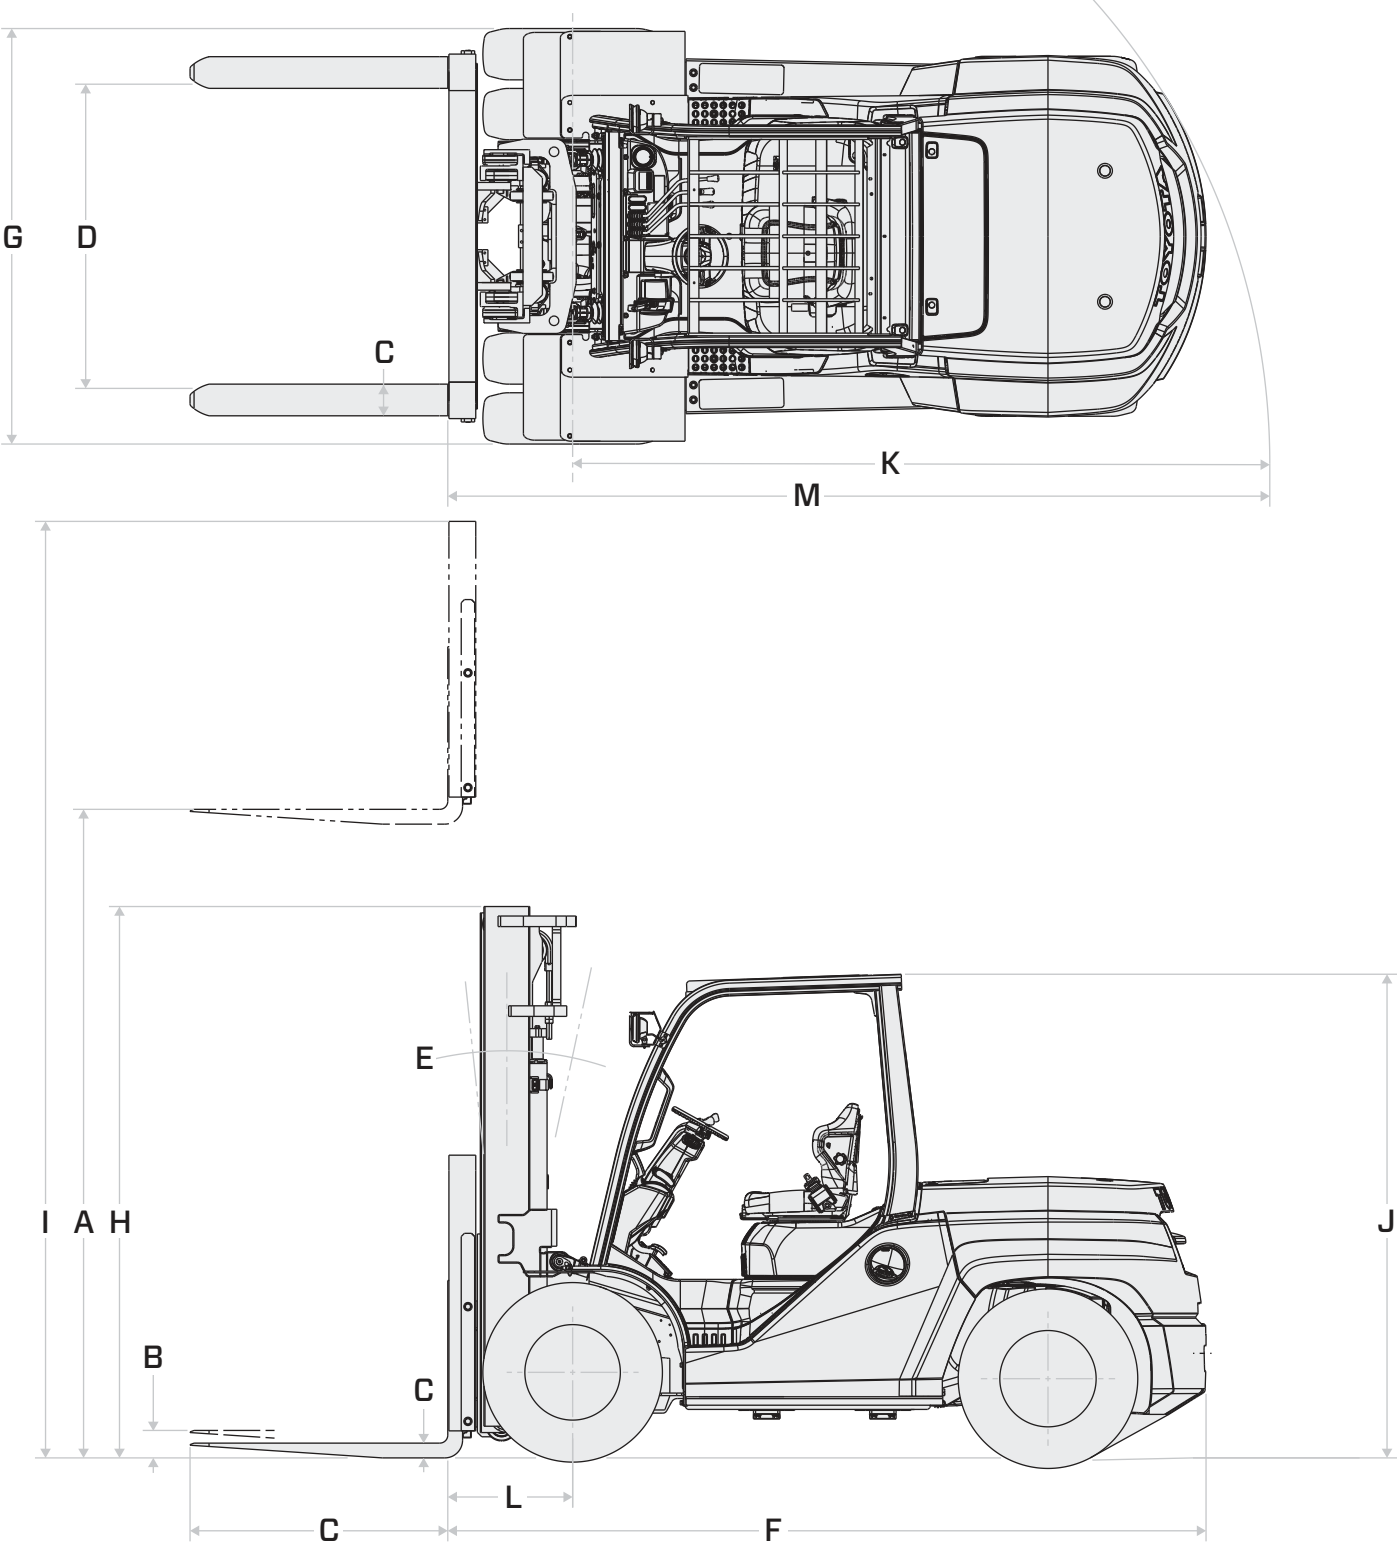

MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
50-8FG60U									
Wide Visible (V)	120.5 (3065)	96.9 (2460)	156.7 (3980)	174.6 (4435)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	132.5 (3365)	102.8 (2610)	168.5 (4280)	186.4 (4735)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	140.5 (3565)	106.7 (2710)	176.4 (4480)	194.3 (4935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	148 (3765)	110.6 (2810)	184.3 (4680)	202.2 (5135)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	179.5 (4565)	130.3 (3310)	215.8 (5480)	233.7 (5935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	219 (5565)	150 (3810)	255.1 (6480)	273 (6935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
Full Free-Lift 3-Stage (FSV)	160 (4065)	92.9 (2360)	196.9 (5000)	214 (5435)	56.1 (1425)	39 (990)	6	6	13300 (6000)
	172 (4365)	96.9 (2460)	208.7 (5300)	225.8 (5735)	60 (1525)	42.9 (1090)	6	6	12900 (5850)
	187.5 (4765)	100.4 (2550)	224.4 (5700)	241.5 (6135)	63.6 (1615)	46.5 (1180)	6	6	12400 (5620)
	199.5 (5065)	110.6 (2810)	236.2 (6000)	253.4 (6435)	73.8 (1875)	56.7 (1440)	6	6	12110 (5500)
	219 (5565)	120.5 (3060)	255.9 (6500)	273 (6935)	83.7 (2125)	66.5 (1690)	6	6	11450 (5200)
	239 (6065)	122.4 (3110)	275.6 (7000)	292.7 (7435)	85.6 (2175)	68.5 (1740)	6	6	11450 (5200)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
50-8FG70U									
Wide Visible (V)	120.5 (3065)	96.9 (2460)	156.7 (3980)	174.6 (4435)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	132.5 (3365)	102.8 (2610)	168.5 (4280)	186.4 (4735)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	140.5 (3565)	106.7 (2710)	176.4 (4480)	194.3 (4935)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	148 (3765)	110.6 (2810)	184.3 (4680)	202.2 (5135)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	179.5 (4565)	130.3 (3310)	215.8 (5480)	233.7 (5935)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	219 (5565)	150 (3810)	255.1 (6480)	273 (6935)	4.9 (125)	4.9 (125)	6	12	14750 (6700)
Full Free-Lift 3-Stage (FSV)	160 (4065)	92.9 (2360)	196.9 (5000)	214 (5435)	56.1 (1425)	39 (990)	6	6	15500 (7000)
	172 (4365)	96.9 (2460)	208.7 (5300)	225.8 (5735)	60 (1525)	42.9 (1090)	6	6	14800 (6730)
	187.5 (4765)	100.4 (2550)	224.4 (5700)	241.5 (6135)	63.6 (1615)	46.5 (1180)	6	6	14750 (6700)
	199.5 (5065)	110.6 (2810)	236.2 (6000)	253.4 (6435)	73.8 (1875)	56.7 (1440)	6	6	14750 (6700)
	219 (5565)	120.5 (3060)	255.9 (6500)	273 (6935)	83.7 (2125)	66.5 (1690)	6	6	12700 (5750)
	239 (6065)	122.4 (3110)	275.6 (7000)	292.7 (7435)	85.6 (2175)	68.5 (1740)	6	6	12550 (5700)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
50-8FG80U									
Wide Visible (V)	121 (3070)	102.8 (2610)	160.8 (4085)	174.8 (4440)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	132.5 (3370)	106.7 (2710)	172.6 (4385)	186.6 (4740)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	140.5 (3570)	110.6 (2810)	180.5 (4585)	194.5 (4940)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	148.5 (3770)	120.5 (3060)	188.4 (4785)	202.4 (5140)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	180 (4570)	140.2 (3560)	219.9 (5585)	233.9 (5940)	5.1 (130)	5.1 (130)	6	12	17500 (8000)

1 Height of standard load backrest is 54" (1370 mm).
NOTE: Mast will be removed for delivery if overall lowered height is greater than 106" (2692 mm).





"I'M HERE TO MAKE SURE YOUR FORKLIFTS DON'T TAKE VACATION DAYS."

Butch - 360 Technician, ProLift, Cincinnati, Ohio



HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry's best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of material handling equipment, Toyota 360 keeps your business running at full speed.

ToyotaForklift.com/360-Support



YOUR BUSINESS IS RIDING ON IT.

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice. Photos may not reflect physical trucks.



LARGE CAP PNEUMATIC Tires

©2024 Toyota Material Handling, Inc.